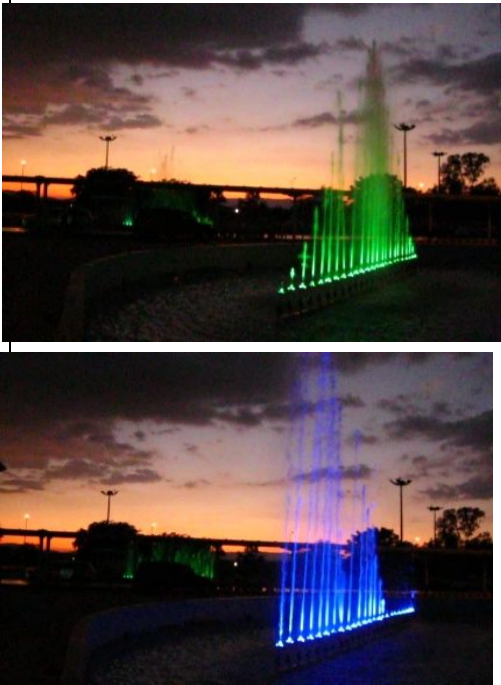


Sr. No.	Item Description		Reference Image	Qty	Unit	Time period	Last Date of Submission (15:00 pm)	Quotation Opening date (16:00 pm)
1	Providing benches for public sitting purpose made of concrete of size 1.5m x 0.6m top resting on 2 supports of required size having height 0.5m with top surface and all 4 faces of concrete provided with leather finish granite of 16 - 20mm thk. with all four edges full moulding and all corners rounded including necessary reinforcement, excavation, foundation block preparation, plastering and painting to concrete and adhesive to granite and concrete as per instructions of Architect & engineer in charge (Item includes curing, finishing, disposal of excavated material, etc.)			90	Nos.	5 days	17/01/2023	17/01/2023

2	Supplying Sandstone for cladding of thickness 12cm and of size min 30-35cm of any one side, color and texture as approved by Engineer incharge including fixing to the concrete surface with polymer adhesive on pillar of general size 2.5'x2.5'x12'		6	No.			
---	---	--	---	-----	--	--	--

3	Providing Carving work on sandstone of 5 inches thickness cladded on concrete pillar of size 3'x3'x12'. Carving depth min 2", height 10", width 6". Carved niches 18nos. On each side of the sandstone cladded pillar. Sandstone cladding to be done, as per reference image attached, on 2 step concrete pedestal of size 1400mmx1400mm and 2000mmx2000mm having step height of 300mm each.		6	No.			
---	--	--	---	-----	--	--	--

4	Supplying Sandstone for cladding of thickness 12cm and of size min 30-35cm of any one side, color and texture as approved by Engineer incharge including fixing to the concrete surface with polymer adhesive on pillar of general size 2.5'x2.5'x20'		5	No.			
---	---	--	---	-----	--	--	--

5	Providing Fountain formation with up and down nozzles formation wave formation & other additional effects Pixabay fairy Nozzle fitted with adjustable Brass Nozzle with chrome plaited & steel swing Size- 8 mm outlet Make-Aquarius Along with Programmable color changing led based nozzle mounted 3watt 12 LED -36watt Luminaries comprise of. 12 Volt X 36 W waterproof fixed lights (of approved make Aquarius). Overall height of light body shall be 190 mm outer Dia and inner dia 50mm and Height 65mm. Luminaries shall have die cast Fully Steel alloy bodies with heat fused epoxy/polyester all over coating. All fasteners shall be of stainless steel. Mounting bracket shall be stainless steel. Imported coloured LED (Choice of colour from Red, Green & Blue) shall be mounted in between sandwich of Three-layer Water proofing pieces of Poly glass of 150 mm dia each sealed by a high-quality elastomer Silicon gasket. LED Bulb shall be reflector Lens Fitted in holder. To prevent ingress of water the waterproof luminaries shall have a Brass cable gland that compensates for variations in cable diameter both initially and ongoing due to factors such as temperature variation and ageing. Wiring shall be 4 core double insulated PVC flexible with variation and ageing. Waterproof luminaries shall be waterproof when fully immersed in water per rating IP68 and shall have been tested All connections shall be fully waterproof. height -65mm (this light is 100% shockproof) Model-Aquarius/Stainless Steel /PC36w/00116B- UW- IP68, Color-RGB, Life-95000hr Body- Fully Stainless Steel 316 Micro processing-based microprocessor programmable data sender Colors' changing controller for 18w lights (for light modal- 36w Micro processing-based microprocessor programmable Data receiver Colors' changing controller for 18w lights (for light modal- 36w microprocessor based Controller: different 7 pattern fully automatic, solid state switching device, Slow motion Control made with Aquarius Technology in side electric panel installed		1	No.			
---	--	--	---	-----	--	--	--

	• Digital control valve for Motor sequencing through command from control by seq. console for 4 Nos Motor Make-Aquarius Electrical panel for nos. 3 Hp Pump, and 4 Nos with starter M.C.B.'s 63amp ammeter, Voltmeter, single phasing preventer, overload protection & indicating light, etc. Electrical panel of cubical type wall/floor mounted, the interconnection shall be carried out with suitable size cables, for recirculation pump in coming MCB', starters, Ammeter, Voltmeter, Single phase preventer & MCB for lights. • Set of incoming 3Pole MCB 63 Amp L&T 1nos. • 3HP Heavy Duty 2Nos • Ammeter for current rating of pump make – AE (Automatic electric) • Voltmeter AE (automatic electric) • Variable device 3 Nos. • Fan 4" x 1nos. Make By-Aquarius Type of Body - Steel sheet with paint powder Cortaid finish enclosure of with hanged front door Floor mounted with provision for incoming & outgoing cabling entry. electrical panel protected against dust & jets of water per rating weather proof body IP 55 With complete pumping system & Electrical System Testing & Commissioning						
--	--	--	--	--	--	--	--

6	Execution of Graffiti on turnkey basis for a façade measuring 20,000 sq. ft. The costs are inclusive of the artist fees, material costs, design & curation fees, labour charges, infrastructure costs, Accidental Insurance of the crew working on the site, safety equipment, etc.		1	No.			
---	--	--	---	-----	--	--	--

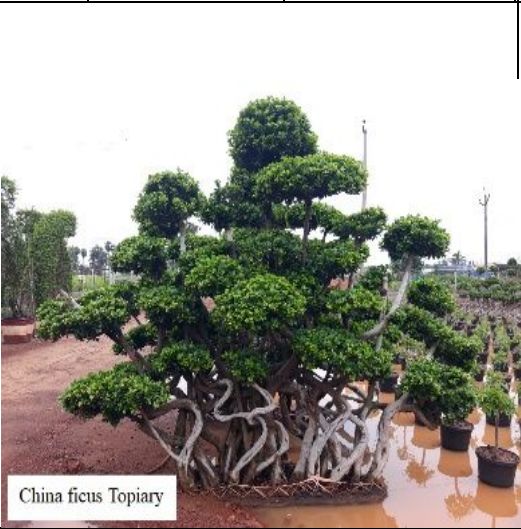
7	Providing & Fixing in position commissioned SCULPTURE art work at the proposed site on provided suitable pedestal. The composition of the commissioned art work shall be of Stainless steel. The commissioned art work shall be laser cut, required any shape, shade and finished with desired surface (Matte/glossy finished) as per detailed drawing. The rate will be inclusive of making necessary provision within the commissioned art work and fixing of the same. The provision of fixing of the art work will be part of and inclusive of the all arrangements like L.N.Key, Studs, anchors fasteners, nuts & bolts, framing scaffolding/ cranes; as required. The Concept of the art work will be generated by the Artist and approved by Architect in charge. Sculpture Dimensions – 39'(H)x13'(W)x7'(D) feet (As per Drawing) Medium – Stainless Steel Grade – 304 Sheet thickness – 2 & 3 mm Pipes & Angles – 38mmx38mm & 50mm x 50mm (4 & 6mm thickness) Weight – 7.8 Tonnes		1	No.			
---	---	--	---	-----	--	--	--

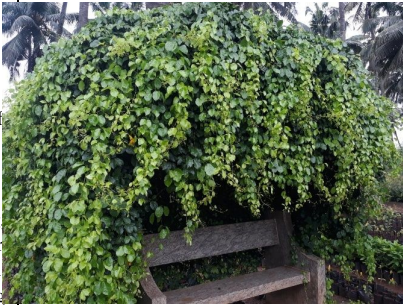
Sr. No.	Item Description		Reference Image	Qty	Unit	Time period	Last Date of Submission (15:00 pm)	Quotation Opening date (16:00 pm)
	Planting Creeper.-Excavating the ground to required depth of 30 cms, removing and conveying unwanted stuff to a required distance as directed. Filling fresh garden soil & Manure in excavated area in 3:1 proportion to a height of 0.6-0.9 m with packet size 10 x 11 inches. Mixing garden soil & manure thoroughly well, levelling, watering on previous night. Planting well rooted creeper as directed by landscape consultant and maintaining till well established by watering.weeding, stirring, replacing casualties etc.complete.					5 days	17/01/2023	17/01/2023
1	a) Mansoa Alliacea (Garlic creeper)			6	nos			
2	b) Pentalinon Luteum (Allamanda creeper)			6	nos			
3	Supply of Decora/Harshdeep/Verve dreamspace/Volcan/Max make plastic pots- model liberty having size 30 x 30 x 26 inches as shown in reference image			6	No.			

4	Supply of Decora/ Harshdeep/Verve dreamspace/Volcan/Max plastic mat pots- model liberty having size 90 x 69 (440 lit) as approved by Architect in charge			81.00	No.
5	Supply of Decora/ Harshdeep/Verve dreamspace/Volcan/Max plastic mat pots- model liberty having size 120 x 93 as approved by Architect in charge			10.00	No.

6	Preparing Shrubbery:-Excavating the ground to required depth of 30cms, removing and conveying unwanted stuff to a required distance as directed.Filling fresh garden soil & Manure in excavated area in 3:1 proportion to a height of 30cms. Mixing garden soil & manure thoroughly well, levelling, watering on previous night. Planting well developed shrubs plant 0.4 Mtrs.apart as directed and maintaining till well established by watering.weeding, stirring, replacing casualties etc.complete.		11,537.00	Sqm
7	Planting large ornamental trees. Excavating the pit with size 0.90x0.90x0.90m removal and conveying unwanted stuff to a required distance as directed.Filling pit with approved excavated material upto a height of 0.30m and remaning height of 0.60m with fresh garden soil and manure in 3:1 proportion.Mixing soil & manure thoroughly well,levelling as directed,watering previous night,Planting 8year or minimum 4.50m height with naked roots,healthy trees sapling as per specifications maintaining till well established by stabilizing it with quadrapad (4 bamboo -like strong support), watering,weeding,stirring of soil,replacing casualties etc.complete.		27.00	No.

8	Planting large ornamental trees. Excavating the pit with size 0.90x0.90x0.90m removal and conveying unwanted stuff to a required distance as directed. Filling pit with approved excavated material upto a height of 0.30m and remaning height of 0.60m with fresh garden soil and manure in 3:1 proportion. Mixing soil & manure thoroughly well, levelling as directed, watering previous night, Planting 4year or minimum 3m height with packet size of 30x30(inches), healthy trees sapling as per specifications maintaining till well established by stabilizing it with quadrapad (4 bamboo -like strong support), watering, weeding, stirring of soil, replacing casualities etc. complete.					
	Bismarkia Palm				7.00	No.
9	Planting large ornamental trees. Excavating the pit with size 0.90x0.90x0.90m removal and conveying unwanted stuff to a required distance as directed. Filling pit with approved excavated material upto a height of 0.30m and remaning height of 0.60m with fresh garden soil and manure in 3:1 proportion. Mixing soil & manure thoroughly well, levelling as directed, watering previous night, Planting 4year or minimum 7.5m height with Packet size of min 40x40 (inches), healthy trees sapling as per specifications maintaining till well established by stabilizing it with quadrapad (4 bamboo -like strong support), watering, weeding, stirring of soil, replacing casualities etc. complete.					
	Foxtail Palm				135.00	No.

10	Planting large ornamental trees. Excavating the pit with size 1.50x1.50x1.50m removal and conveying unwanted stuff to a required distance as directed. Filling pit with approved excavated material upto a height of 0.30m and remaining height of 0.60m with fresh garden soil and manure in 3:1 proportion. Mixing soil & manure thoroughly well, levelling as directed, watering previous night, Planting 4 year or minimum 3m height with naked roots system (2.5-3ft wide), healthy trees sapling as per specifications maintaining till well established by stabilizing it with quadrapad (4 bamboo-like strong support), watering, weeding, stirring of soil, replacing casualities etc. complete.	 China ficus Topiary				
	China Ficus Topiary				5.00	No.
	Planting large ornamental trees. Planting a tree in POT size of minimum 30x30 (inches). Filling pot with fresh garden soil and manure in 3:1 proportion. Mixing soil & manure thoroughly well, levelling as directed, watering previous night, Planting 4 year or minimum 3m height in POT, healthy trees sapling as per specifications maintaining till well established by watering, weeding, stirring of soil, replacing casualities etc. complete.					
11	a) Bougainvillea topiary - glabra				28.00	Nos.

14	Planting Creeper.-Excavating the ground to required depth of 30 cms, removing and conveying unwanted stuff to a required distance as directed. Filling fresh garden soil & Manure in excavated area in 3:1 proportion to a height of 0.6-0.9 m with packet size 10 x 11 inches. Mixing garden soil & manure thoroughly well, levelling watering on previous night. Planting well rooted creeper as directed by landscape consultant and maintaining till well established by watering,weeding, stirring, replacing casualties etc.complete.	 			
	a) Dolichandra unguis-cati (cat's claw creeper)			40.00	No.
15	Planting large ornamental trees. Planting a tree in POT size of minimum 30x30 (inches). Filling pot with fresh garden soil and manure in 3:1 proportion.Mixing soil & manure thoroughly well,levelling as directed,watering previous night,Planting 4year or minimum 2m height in POT and plant canopy min 2m dia, healthy trees sapling as per specifications maintaining till well established by watering,weeding,stirring of soil,replacing casualties etc.complete as guided by Architect in-charge	 			
	a) Plumeria Singaporensis/American			10.00	No.

16	Planting large ornamental trees. Excavating the pit with size 0.90x0.90x0.90m removal and conveying unwanted stuff to a required distance as directed. Filling pit with approved excavated material upto a height of 0.30m and remaining height of 0.60m with fresh garden soil and manure in 3:1 proportion. Mixing soil & manure thoroughly well, levelling as directed, watering previous night, Planting 8 year or minimum 4.50m height with naked roots, healthy trees sapling as per specifications maintaining till well established by stabilizing it with quadrapad (4 bamboo like strong support), watering, weeding, stirring of soil, replacing casualties etc. complete.	 Copernicia Alba				
	Copernicia alba				1.00	No.
17	Planting large ornamental trees. Excavating the pit with size .90x.9x.9m removal and conveying unwanted stuff to a required distance as directed. Filling pit with approved excavated material upto a height of 0.30m and remaining height of 0.60m with fresh garden soil and manure in 3:1 proportion. Mixing soil & manure thoroughly well, levelling as directed, watering previous night, Planting 4 year or minimum 3M height with packet size 25x25 (inches), healthy trees sapling as per specifications maintaining till well established by watering, weeding, stirring of soil, replacing casualties etc. complete.					
	Ficus Topiary multiball				16	No.

[illegible]

18	Planting large ornamental trees. Excavating the pit with size 0.90x0.90x0.90m removal and conveying unwanted stuff to a required distance as directed.Filling pit with approved excavated material upto a height of 0.30m and remaning height of 0.60m with fresh garden soil and manure in 3:1 proportion.Mixing soil & manure thoroughly well,levelling as directed,watering previous night,Planting 4year or minimum 4m height with packet size of min 30x30 (inches), healthy trees sapling as per specifications maintaining till well established by stabilizing it with quadrapad (4 bamboo like strong support), watering,weeding,stirring of soil,replacing casualities etc.complete.					
	Terminalia variegated				20	No.